


**FICHE TECHNIQUE**

**PTFE coated glass fabric adhesive: 216AAC**

**FABRIC PICTURE:**

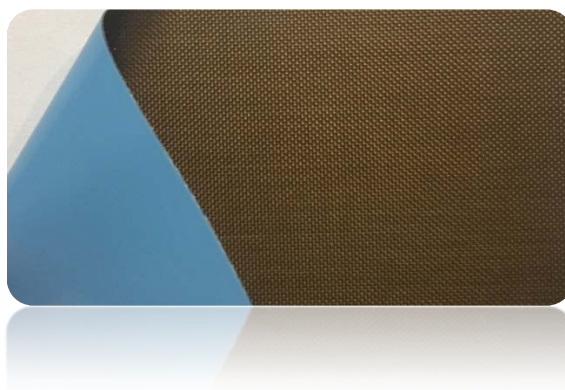

**DESCRIPTION AND PROPERTIES:**

216AAC reference is a PTFE coated glass fabric support (Polytetrafluoroethylene) with and adhesive side (acrylic):

- ✓ Non-sticky – very smooth and very good sliding coefficient
- ✓ Operating temperature resistance from -40°C to +170°C
- ✓ Self-extinguishing
- ✓ Excellent dimensional stability
- ✓ Temperature and pressure do not have any noticeable effect and no creep
- ✓ Tasteless and odorless. Ability to enter with food products.
- ✓ Excellent resistance to friction
- ✓ Thanks to its chemical inertness, PTFE is unassailable by any chemical product, except molten Sodium (Na) and Potassium (K), as well as products that attack glass.
- ✓ Water recovery less than 0.01 % after 24 hours.

PROPERTIES	VALUE	UNITY
Fabric thickness	0.15	mm
Nominal fabric weight	296	g/m <sup>2</sup>
PTFE percentage	63	%
Adhesion	4,00	N/5 cm
Total thickness (fabric + silicone adhesive)	0.19	mm
Temperature resistance	-40/ + 170	°C