


FICHE TECHNIQUE

PTFE coated glass fabric adhesive: 216AC

FABRIC PICTURE:

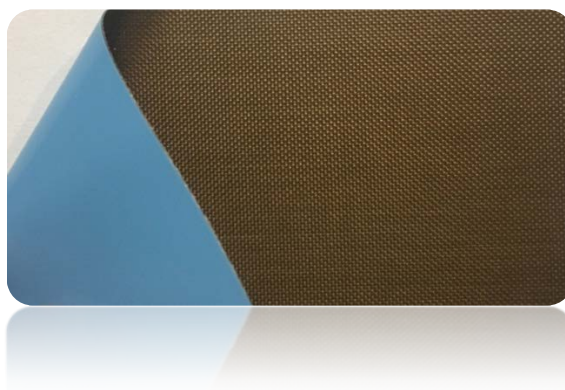

DESCRIPTION AND PROPERTIES:

216AC reference is a PTFE coated glass fabric support (Polytetrafluoroethylene) with and adhesive side (acrylic):

- ✓ Non-sticky – very smooth and very good sliding coefficient
- ✓ Operating temperature resistance from -40°C to +170°C
- ✓ Self-extinguishing
- ✓ Excellent dimensional stability
- ✓ Temperature and pressure do not have any noticeable effect and no creep
- ✓ Tasteless and odorless. Ability to enter with food products.
- ✓ Excellent resistance to friction
- ✓ Thanks to its chemical inertness, PTFE is unassailable by any chemical product, except molten Sodium (Na) and Potassium (K), as well as products that attack glass.
- ✓ Water recovery less than 0.01 % after 24 hours.

PROPERTIES	VALUE	UNITY
Fabric thickness	0.13	mm
Nominal fabric weight	255	g/m ²
PTFE percentage	54	%
Adhesion	4,00	N/5 cm
Total thickness (fabric + silicone adhesive)	0.175	mm
Temperature resistance	-40/ + 170	°C